



Surface finish

Installation




Technical data

Glass thickness	≥ 6 mm
Overall dimensions H x W	15.4 x 45 mm
Actuation	Single actuation
Sealing profile material	Silicone, self-extinguishing
Travel	11 mm
Minimum length	235 mm (cannot be reduced)
Standard lengths	708, 833, 958, 1,083, 1,208 mm
Maximum length	1,333 mm
Can be reduced by	125 mm
Individually packed	Foil tube
Article number	1-875 C-0

Accessories
(included in delivery)

SCHALL-EX®
SLIDE GS-A

- ▶ Suitable for all doors with a glass thickness greater than 6 mm
 - ▶ Seal and separate cover profile, self-adhesive
 - ▶ Reduced storage costs
 - ▶ Suitable for retrofitting
- ▶ Silver-coloured, anodised C-0
 - ▶ Stainless steel-coloured, anodised C-31
 - ▶ For fitting: on the door leaf
 - ▶ Lock side actuator

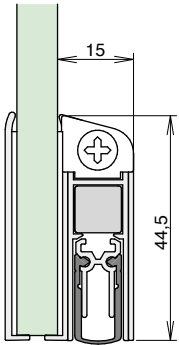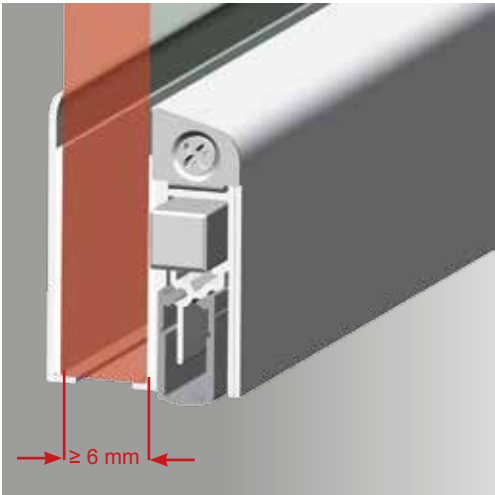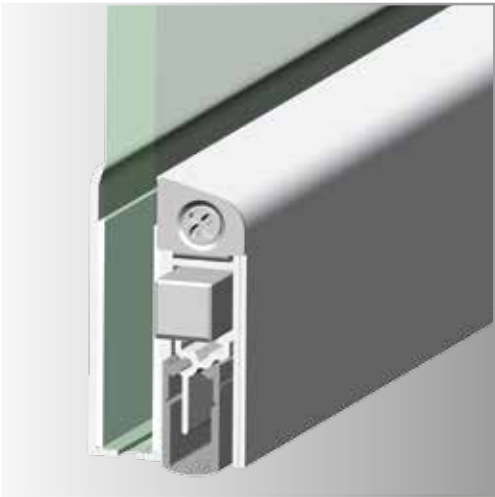

Art. no. 5503
including stainless steel press plate