



## Base

## Surface finish

## Stops

## Technical data

Overall dimensions H x W

Actuation

Material of seal profile

Throw

Minimum length

Standard lengths

Maximum length

Can be cut to length


Individually packed

Accessories  
(included in delivery)

Internet

## SCHALL-EX® SLIDE APPLIC A

► For sliding doors in front of a wall

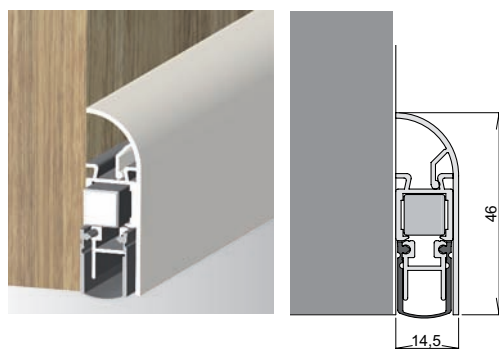

- Aluminium
- Folding cover profile
- Covered screws

- Anodised silver-coloured C-0
- Powder-coated white RAL 9016
- Anodised dark bronze C-34



14.5 x 46 mm

1-sided, lock side

Silicone, self-extinguishing

recommended: 5 mm (max. 11mm)

235 mm (cannot be cut to length)

805, 930, 1,055 mm

1,333 mm

125 mm


Plastic bag

Item no. 5129  
including zinc die-cast actuator plate  
and stop buffer

Installation instructions  
List of accessories with illustrations  
Cross-sections, 1:1

## SCHALL-EX® SLIDE APPLIC T

► For sliding doors in front of a wall

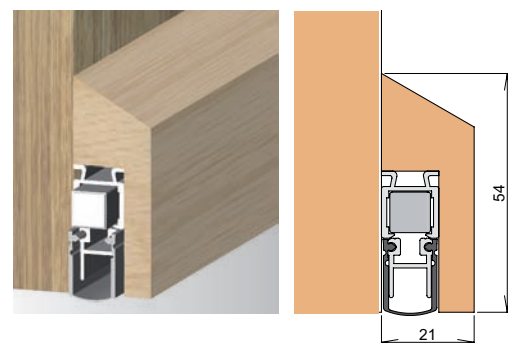

- Oak

- Untreated oak, for on-site  
adjustment to the door surface



21 x 54 mm

1-sided, lock side

Silicone, self-extinguishing

recommended: 5 mm (max. 11mm)

235 mm (cannot be cut to length)

805, 930, 1,055 mm

1,333 mm

125 mm

Plastic bag

Item no. 5129  
including zinc die-cast actuator plate  
and stop buffer

Installation instructions  
List of accessories with illustrations  
Cross-sections, 1:1